

WELUX LED Downlight


Kupfer Anti-Glare Series

Housing and Trim: Die-cast aluminium
 Mounting type: Recess (Trim, Trimless)
 Heat Management: Die-cast aluminium heat sink
 Reflector: Silver
 Diffuser: PMMA Lens
 Features: Tiltable 30°, rotatable 355°, bottom maintenance

LED Modules
 GERMAN Technology
 Comfort COB Gen2 - 500lm - 1,400lm
 Long service life time : 50,000 hours (L80/B10)
 Ambient temperature : -40°C to +40°C

Drivers: 100/150/250mA
 (optional: Dimmable available)
 Power factor at full load : > 0.97
 SELV , Low Ripple current < 1% , THD < 15%
 Energy efficiency : A+
 Warranty: 5 years

Standards
 EN 620301: LED modules for general lighting - Safety specification
 EN 62471: Photobiological safety of lamps and systems
 EN 55015: Radio disturbance emissions
 EN 61000-3-2 Limited for harmonic emissions
 EN 61547: Immunity requirements

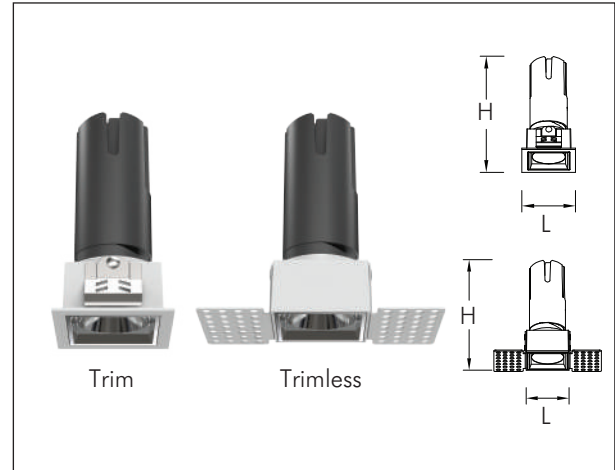

Powered by:



Application: Commercial Building, Lobby, Conventional Hall, Ballroom, Concourse

Model	Module Wattage	System Wattage	Voltage	Frequency	Power Factor	Colour	Colour Temperature	Module Luminous Flux (lm)	Module Efficacy lm/W	Typ. Beam Angle	Typ. CRI Ra	Dimension (W x L x H) mm	Dimension (Cut out) mm
K2S-2-3W	3.2W	3.5W	220-240	50/60Hz	0.95	Warm white	2700K	520	161	15, 24, 36, 55	>82	53 x 53 x 106	45 x 45
			220-240	50/60Hz	0.95	Warm white	3000K	545	169	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	560	173	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	565	175	15, 24, 36, 55	>82		
K2S-2-6W	5.0W	5.6W	220-240	50/60Hz	0.95	Warm white	2700K	750	151	15, 24, 36, 55	>82	53 x 53 x 106	45 x 45
			220-240	50/60Hz	0.95	Warm white	3000K	790	159	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	815	164	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	825	166	15, 24, 36, 55	>82		
K2S-2-9W	8.6W	9.4W	220-240	50/60Hz	0.95	Warm white	2700K	1360	159	15, 24, 36, 55	>82	53 x 53 x 106	45 x 45
			220-240	50/60Hz	0.95	Warm white	3000K	1430	167	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	1475	172	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	1490	174	15, 24, 36, 55	>82		
K2S-TL-2-3W	3.2W	3.5W	220-240	50/60Hz	0.95	Warm white	2700K	520	161	15, 24, 36, 55	>82	44 x 44 x 106	49 x 45
			220-240	50/60Hz	0.95	Warm white	3000K	545	169	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	560	173	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	565	175	15, 24, 36, 55	>82		
K2S-TL-2-6W	5.0W	5.6W	220-240	50/60Hz	0.95	Warm white	2700K	750	151	15, 24, 36, 55	>82	44 x 44 x 106	49 x 45
			220-240	50/60Hz	0.95	Warm white	3000K	790	159	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	815	164	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	825	166	15, 24, 36, 55	>82		
K2S-TL-2-9W	8.6W	9.4W	220-240	50/60Hz	0.95	Warm white	2700K	1360	159	15, 24, 36, 55	>82	44 x 44 x 106	49 x 45
			220-240	50/60Hz	0.95	Warm white	3000K	1430	167	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	1475	172	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	1490	174	15, 24, 36, 55	>82		

*Colour tolerance: 3 MacAdam **Production tolerance of luminous flux and efficiency: $\pm 10\%$ ***Min. CRI $\pm 3\%$ ****Power consumption: $\pm 10\%$
 The values contained in this data sheet can change due to technical innovations without notifications, therefore kindly refer to us when during order.

WELUX LED Downlight


Kupfer Anti-Glare Series

Housing and Trim: Die-cast aluminium
 Mounting type: Recess (Trim, Trimless)
 Heat Management: Die-cast aluminium heat sink
 Reflector: Silver
 Diffuser: PMMA Lens
 Features: Tiltable 30°, rotatable 355°, bottom maintenance

LED Modules
 GERMAN Technology
 Comfort COB Gen2 - 2x 500lm - 1,400lm
 Long service life time : 50,000 hours (L80/B10)
 Ambient temperature : -40°C to +40°C

Drivers: 100/150/250mA
 (optional: Dimmable available)
 Power factor at full load : > 0.97
 SELV , Low Ripple current < 1% , THD < 15%
 Energy efficiency : A+
 Warranty: 5 years

Standards
 EN 620301: LED modules for general lighting - Safety specification
 EN 62471: Photobiological safety of lamps and systems
 EN 55015: Radio disturbance emissions
 EN 61000-3-2 Limited for harmonic emissions
 EN 61547: Immunity requirements

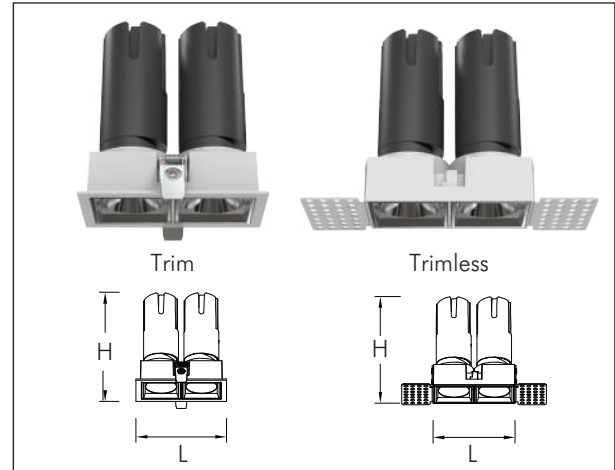

Powered by:



Application: Commercial Building, Lobby, Conventional Hall, Ballroom, Concourse

Model	Module Wattage	System Wattage	Voltage	Frequency	Power Factor	Colour	Colour Temperature	Module Luminous Flux (Lm)	Module Efficacy Lm/W	Typ. Beam Angle	Typ. CRI Ra	Dimension (W x L x H) mm	Dimension (Cut out) mm
K2S-2-2x3W	2x3.2W	2x3.5W	220-240	50/60Hz	0.95	Warm white	2700K	2x520	161	15, 24, 36, 55	>82	96 x 53 x 106	89 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	2x545	169	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	2x560	173	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	2x565	175	15, 24, 36, 55	>82		
K2S-2-2x6W	2x5.0W	2x5.6W	220-240	50/60Hz	0.95	Warm white	2700K	2x750	151	15, 24, 36, 55	>82	96 x 53 x 106	89 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	2x790	159	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	2x815	164	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	2x825	166	15, 24, 36, 55	>82		
K2S-2-2x9W	2x8.6W	2x9.4W	220-240	50/60Hz	0.95	Warm white	2700K	2x1360	159	15, 24, 36, 55	>82	96 x 53 x 106	89 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	2x1430	167	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	2x1475	172	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	2x1490	174	15, 24, 36, 55	>82		
K2S-TL-2-2x3W	2x3.2W	2x3.5W	220-240	50/60Hz	0.95	Warm white	2700K	2x520	161	15, 24, 36, 55	>82	87 x 44 x 106	89 x 47
			220-240	50/60Hz	0.95	Warm white	3000K	2x545	169	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	2x560	173	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	2x565	175	15, 24, 36, 55	>82		
K2S-TL-2-2x6W	2x5.0W	2x5.6W	220-240	50/60Hz	0.95	Warm white	2700K	2x750	151	15, 24, 36, 55	>82	87 x 44 x 106	89 x 47
			220-240	50/60Hz	0.95	Warm white	3000K	2x790	159	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	2x815	164	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	2x825	166	15, 24, 36, 55	>82		
K2S-TL-2-2x9W	2x8.6W	2x9.4W	220-240	50/60Hz	0.95	Warm white	2700K	2x1360	159	15, 24, 36, 55	>82	87 x 44 x 106	89 x 47
			220-240	50/60Hz	0.95	Warm white	3000K	2x1430	167	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	2x1475	172	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	2x1490	174	15, 24, 36, 55	>82		

*Colour tolerance: 3 MacAdam **Production tolerance of luminous flux and efficiency: ±10% ***Min. CRI ±3% ****Power consumption: ±10%
 The values contained in this data sheet can change due to technical innovations without notifications, therefore kindly refer to us when during order.



WELUX LED Downlight


Kupfer Anti-Glare Series

Housing and Trim: Die-cast aluminium
 Mounting type: Recess (Trim, Trimless)
 Heat Management: Die-cast aluminium heat sink
 Reflector: Silver
 Diffuser: PMMA Lens
 Features: Tiltable 30°, rotatable 355°, bottom maintenance

LED Modules
 GERMAN Technology
 Comfort COB Gen2 - 3x 500lm - 1,400lm
 Long service life time : 50,000 hours (L80/B10)
 Ambient temperature : -40°C to +40°C

Drivers: 100/150/250mA
 (optional: Dimmable available)
 Power factor at full load : > 0.97
 SELV , Low Ripple current < 1% , THD < 15%
 Energy efficiency : A+
 Warranty: 5 years

Standards
 EN 620301: LED modules for general lighting - Safety specification
 EN 62471: Photobiological safety of lamps and systems
 EN 55015: Radio disturbance emissions
 EN 61000-3-2 Limited for harmonic emissions
 EN 61547: Immunity requirements

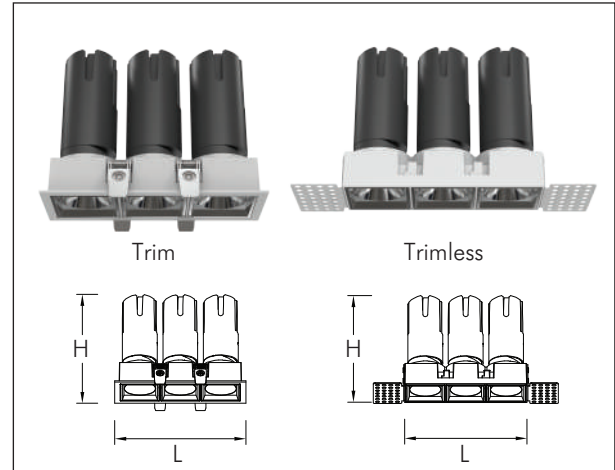

Powered by:



Application: Commercial Building, Lobby, Conventional Hall, Ballroom, Concourse

Model	Module Wattage	System Wattage	Voltage	Frequency	Power Factor	Colour	Colour Temperature	Module Luminous Flux (Lm)	Module Efficacy Lm/W	Typ. Beam Angle	Typ. CRI Ra	Dimension (W x L x H) mm	Dimension (Cut out) mm
K2S-2-3x3W	3x3.2W	3x3.5W	220-240	50/60Hz	0.95	Warm white	2700K	3x520	161	15, 24, 36, 55	>82	138 x 53 x 106	131 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	3x545	169	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	3x560	173	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	3x565	175	15, 24, 36, 55	>82		
K2S-2-3x6W	3x5.0W	3x5.6W	220-240	50/60Hz	0.95	Warm white	2700K	3x750	151	15, 24, 36, 55	>82	138 x 53 x 106	131 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	3x790	159	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	3x815	164	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	3x825	166	15, 24, 36, 55	>82		
K2S-2-3x9W	3x8.6W	3x9.4W	220-240	50/60Hz	0.95	Warm white	2700K	3x1360	159	15, 24, 36, 55	>82	138 x 53 x 106	131 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	3x1430	167	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	3x1475	172	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	3x1490	174	15, 24, 36, 55	>82		
K2S-TL-2-3x3W	3x3.2W	3x3.5W	220-240	50/60Hz	0.95	Warm white	2700K	3x520	161	15, 24, 36, 55	>82	129 x 44 x 106	132 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	3x545	169	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	3x560	173	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	3x565	175	15, 24, 36, 55	>82		
K2S-TL-2-3x6W	3x5.0W	3x5.6W	220-240	50/60Hz	0.95	Warm white	2700K	3x750	151	15, 24, 36, 55	>82	129 x 44 x 106	132 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	3x790	159	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	3x815	164	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	3x825	166	15, 24, 36, 55	>82		
K2S-TL-2-3x9W	3x8.6W	3x9.4W	220-240	50/60Hz	0.95	Warm white	2700K	3x1360	159	15, 24, 36, 55	>82	129 x 44 x 106	132 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	3x1430	167	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	3x1475	172	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	3x1490	174	15, 24, 36, 55	>82		

*Colour tolerance: 3 MacAdam **Production tolerance of luminous flux and efficiency: ±10% ***Min. CRI ±3% ****Power consumption: ±10%
 The values contained in this data sheet can change due to technical innovations without notifications, therefore kindly refer to us when during order.


WELUX LED Downlight

Kupfer Anti-Glare Series

Housing and Trim: Die-cast aluminium
 Mounting type: Recess (Trim, Trimless)
 Heat Management: Die-cast aluminium heat sink
 Reflector: Silver
 Diffuser: PMMA Lens
 Features: Tiltable 30°, rotatable 355°, bottom maintenance

LED Modules
 GERMAN Technology
 Comfort COB Gen2 - 4x 500lm - 1,400lm
 Long service life time : 50,000 hours (L80/B10)
 Ambient temperature : -40°C to +40°C

Drivers: 100/150/250mA
 (optional: Dimmable available)
 Power factor at full load : > 0.97
 SELV , Low Ripple current < 1% , THD < 15%
 Energy efficiency : A+
 Warranty: 5 years

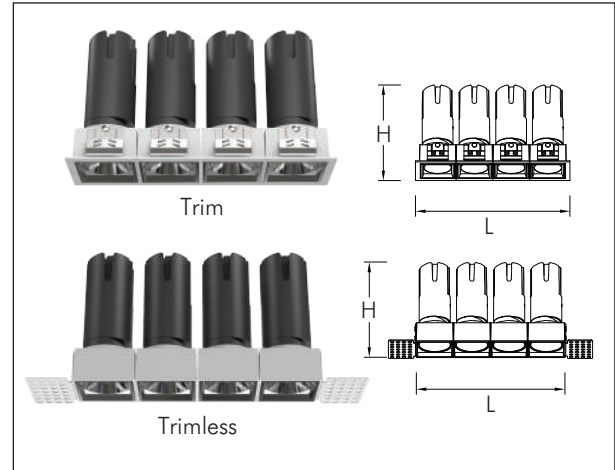

Standards
 EN 620301: LED modules for general lighting - Safety specification
 EN 62471: Photobiological safety of lamps and systems
 EN 55015: Radio disturbance emissions
 EN 61000-3-2 Limited for harmonic emissions
 EN 61547: Immunity requirements

Powered by:



Application: Commercial Building, Lobby, Conventional Hall, Ballroom, Concourse

Model	Module Wattage	System Wattage	Voltage	Frequency	Power Factor	Colour	Colour Temperature	Module Luminous Flux (lm)	Module Efficacy lm/W	Typ. Beam Angle	Typ. CRI Ra	Dimension (W x L x H) mm	Dimension (Cut out) mm
K2S-2-4x3W	4x3.2W	4x3.5W	220-240	50/60Hz	0.95	Warm white	2700K	4x520	161	15, 24, 36, 55	>82	185 x 53 x 106	176 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	4x545	169	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	4x560	173	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	4x565	175	15, 24, 36, 55	>82		
K2S-2-4x6W	4x5.0W	4x5.6W	220-240	50/60Hz	0.95	Warm white	2700K	4x750	151	15, 24, 36, 55	>82	185 x 53 x 106	176 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	4x790	159	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	4x815	164	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	4x825	166	15, 24, 36, 55	>82		
K2S-2-4x9W	4x8.6W	4x9.4W	220-240	50/60Hz	0.95	Warm white	2700K	4x1360	159	15, 24, 36, 55	>82	185 x 53 x 106	176 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	4x1430	167	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	4x1475	172	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	4x1490	174	15, 24, 36, 55	>82		
K2S-TL-2-4x3W	4x3.2W	4x3.5W	220-240	50/60Hz	0.95	Warm white	2700K	4x520	161	15, 24, 36, 55	>82	176 x 44 x 106	179 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	4x545	169	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	4x560	173	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	4x565	175	15, 24, 36, 55	>82		
K2S-TL-2-4x6W	4x5.0W	4x5.6W	220-240	50/60Hz	0.95	Warm white	2700K	4x750	151	15, 24, 36, 55	>82	176 x 44 x 106	179 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	4x790	159	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	4x815	164	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	4x825	166	15, 24, 36, 55	>82		
K2S-TL-2-4x9W	4x8.6W	4x9.4W	220-240	50/60Hz	0.95	Warm white	2700K	4x1360	159	15, 24, 36, 55	>82	176 x 44 x 106	179 x 46
			220-240	50/60Hz	0.95	Warm white	3000K	4x1430	167	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Neutral white	4000K	4x1475	172	15, 24, 36, 55	>82		
			220-240	50/60Hz	0.95	Cool white	5700K	4x1490	174	15, 24, 36, 55	>82		

*Colour tolerance: 3 MacAdam **Production tolerance of luminous flux and efficiency: $\pm 10\%$ ***Min. CRI $\pm 3\%$ ****Power consumption: $\pm 10\%$
 The values contained in this data sheet can change due to technical innovations without notifications, therefore kindly refer to us when during order.